


INTERRA

CERTIFIED R&D CENTER OF AUTOMATION

Developer of Uniqueness

Water Flood Detector with KNX

Product Manual

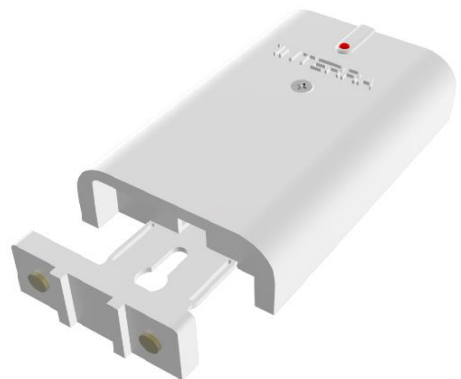

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded versions by updates. It is your responsibility to ensure that your application meets with your specifications.

INTERRA MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR NONSTATUTORY, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE.

Interra disclaims all liability arising from this information and its use. Use of Interra devices in life support and / or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Interra from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise under any Interra intellectual rights.

Trademarks

The Interra name and logo and the Interra ITR401-0001 KNX Water Flood Detector devices are registered trademarks of Interra Technology in Turkey and other countries.

All other trademarks mentioned herein are property of the Interra Technology.

© 2021, Interra, Printed in Turkey, All Rights Reserved.



Printed on recycled paper.

TS EN ISO 9001:2008

TO OUR CUSTOMERS

One of our most important aims is to provide you with the best documentation possible to use successfully your Interra products. Focusing on this, we will keep on improving our documentation to better suit your needs. Our publications will be updated as new volumes as soon as changes are introduced.

If you have any questions or comments regarding this publication, do not hesitate to contact us:

E-mail: info@interra.com.tr

Tel: +90 (216) 326 26 40 Fax: +90 (216) 324 25 03

Most Current Product Manual

To obtain the most up-to-date version of this product manual, please visit our Web site at:

<http://www.interra.com.tr>

You can determine the version of an Interra document examining its literature number found on the bottom right corner of any page.

The first two letters of the literature are the type of document. The numbers that follow are the creation date of the document and the last letter is the version (e.g., PM181017001A is the version A of a product manual created on the date 17/10/18).

TABLE OF CONTENTS

1.	SCOPE OF THE DOCUMENT	5
2.	DESCRIPTION OF THE PRODUCT	6
3.	DETAILED SPECIFICATION OF THE FUNCTIONS	7
3.1.	GENERAL	7
3.1.1.	List of Parameters	7
3.1.2.	List of Objects	9
4.	MAIN TECHNICAL CHARACTERISTICS	Hata! Yer işareti tanımlanmamış.

1. CONTENT OF THE DOCUMENT

This document contains the specifications of Interra's ITR401-0001 KNX Water Flood Detector product and the project context. This document applies to all products involved as a common information base and is binding on KNX system equipments involved in the project. Changes are permitted only in coordination with the product management.

2. PRODUCT DESCRIPTION

Leaks can cause serious damage to your home. ITR401-0001 is a water flood detector equipped with KNX system. ITR401-0001 is an early warning system that notifies you through KNX bus. By catching it early, you may be able to avoid expensive repairs and loss of treasured items. Due to the existence of the KNX system, users have a chance to arrange any kind of additional alert system.

The detector can be placed near trouble spots like the sump pump, water heater, washer and under sinks. Each can be individually named and registered in main control panel. The detector works based on the theory of liquid conductivity. The performance is reliable and the installation is easy. The detector can be placed near trouble spots like the sump pump, water heater, washer, under sinks or any desired location such as computer rooms, warehouses, water tanks mainly any hidden areas where water can leak without notice. When the water-based liquids reach to probes of detector, it will send telegrams to the KNX bus.

3. DETAILED SPECIFICATION OF THE FUNCTIONS

The most outstanding features of ITR401-0001 are:

- Module alive beacon notification.
- Device is eligible to alert the users via buzzer, LED or relay output. Users can activate the LED or buzzer via ETS parameters
- The LED is available for two colour status which operated inversely as green and red.
- Alarm detection delay selections are available. Users can determine the delay via ETS parameters.
- Device has a sensing probe extends downward up to 25cm. The sensing probe operates determined alarm condition when water presence is detected.
- Suspending the alarm for desired duration feature is available.
- Alarm reset feature is available.

3.1. GENERAL

3.1.1. List of Parameters

PARAMETER	DESCRIPTION	VALUES
Module Alive Beacon	This parameter allows sending the value “true” periodically while the module is running.	Disabled Enabled
Module Alive Beacon Interval (sec)*1	This parameter determines the Module Alive Beacon sending period.	3600 (1...65535)
Water Alarm Polarity	This parameter allows to determine telegram polarity of water alarm.	1:Alarm; 0: No alarm / 1: No Alarm; 0: Alarm
Send water alarm delay (sec)	A delay time for the water alarm can be assigned via this object.	3 (1-255)
Send water alarm periodically	Alarms can be sent periodically at the intervals specified in this parameter.	Disabled, 5s, 10s, 30s, 1min, 5min, 10min, 20min, 30min, 40min, 50min, 1h, 2h, 3h, 4h, 5h, 6h, 12h, 24h
Status Led	Status LED indicates device is energized or not. The led can be arranged as always on or always off via this parameter.	Always on Always off
Alarm Led	This parameter used for behaviour of water alarm led.	Only alarm Always off

Alarm led blink^{*2}	If alarm LED is arranged as Only alarm, this parameter allows alarm LED to make blink.	Disabled Enabled
Alarm led blink duration (sec) ^{*2}	Alarm LED blink duration can be determined via this object.	500 (300-3000) msec
Buzzer	This parameter determines whether buzzer will be used on alarm condition or not.	Enabled Disabled
Buzzer duration^{*3}	If buzzer is arranged to be used on alarm condition, duration of buzzer can be determined via this parameter.	5min (5min, 10min, 20min, 30min, 40min, 50min, 1h, 2h, 3h, 4h, 5h, 6h, 12h, 24h)
Alarm reset	Alarm reset parameter is used to end the alarm condition of device. Disabled: Determined alarm conditions start when the device detects water presence. As soon as probes get dry alarm conditions end. Enabled: When device detects water presence, alarm conditions start. Even if probes get dry, alarm conditions do not end until device is reset.	Disabled Enabled
Alarm reset polarity^{*4}	Alarm reset polarity is determined via this parameter.	1:Reset / 0:Nothing 1:Nothing / 0:Reset
Device suspend	This parameter used to mute the device on alarm condition for a certain period of time.	Disabled Suspend on value 0 Suspend on value 1
Duration of suspend (min) ^{*5}	Suspend duration is determined via this parameter.	1h (Infinity, 30min, 40min, 50min, 1h, 2h, 3h, 4h, 5h, 6h, 12h, 24h)
Test sensor	This parameter is used for testing of the sensor without and water presence.	Disabled Enabled

^{*1}This parameter is only visible when the parameter “Module Alive Beacon” is set to “Enabled”.

^{*2}This parameters is only visible when the parameter “Alarm led blink” is set to “Enabled”.

^{*3}This parameter is only visible when the parameter “Buzzer” is set to “Enabled”.

^{*4}This parameter is only visible when the parameter “Alarm reset” is set to “Enabled”.

⁵This parameter is only visible when the parameter “Device Suspend” is set to “Suspend on value 0” or “Suspend on value 1”.

3.1.2. List of Objects

OBJ NAME	FUNCTION	TYPE	FLAG
General	Alive Beacon	1 bit	CWU

This object is only visible when the “Module Alive Beacon” function is enabled. Via the group address linked, the value “true” is sent while the module is running.

Water Alarm	1:Alarm; 0: No alarm / 1: No Alarm; 0: Alarm	1 bit	
-------------	---	-------	--

This object indicates water on sensor.

Alarm Reset	1:Enabled / 0:Disabled	1 bit	RW
-------------	------------------------	-------	----

Used to reset the water alarm object.

Device Suspend	Disabled / Suspend on value 0 / Suspend on value 1	1 bit	CWU
----------------	--	-------	-----

This object mutes the device.

Sensor state	Output	1 bit	
--------------	--------	-------	--

Sensor status information indication object.

Test Sensor	1:Enabled / 0:Disabled	1 bit	CWT
-------------	------------------------	-------	-----

This object is used to test the sensor whether working or not.

4. TECHNICAL INFORMATION

Product Code	ITR401-0001
Power supply	EIB power supply
Power consumption	10 mA (Alarm condition)
LED indicators	1 x Alarm (red) / Operating (green) LED
	1 x Programming LED
Buttons	1 x Programming button
Output current	0,5 A @125 V DC
	1 A @24 V DC
Connection cable	0,25 mm ² – 1,5 mm ²
Type of protection	IP 20
Temperature range	Operation (-40°C...70°C)
Maximum air humidity	<90 RH
Flammability	Non-flammable product
Colour	Light Grey
Dimensions	55x88,1x21,6 mm (WxHxD)
Configuration	ETS
Certification	KNX